

## SERVICE MASTER® 600FR

Article No.: 63203GT01

SERVICE MASTER® 600FR Coverall is made from a new revolutionary fabric which is soft, resistant to noxious dust and splash in accordance with CE Category 3 Type 5 & 6, Antistatic to EN1149, protects against radioactive particles as per EN1073.2 and EN ISO 14116:2008 against limited flame spread materials.

SERVICE MASTER is a 5-ply fabric. There are three middle layers which act as filters and these are sandwiched between two layers of spun-bonded polypropylene. These outer layers provide strength and durability whilst the middle layers hold out chemical splash and dust.



- Comfortable Design
- Silicon Free Components
- Chemical & Dust Resistant
- Ventilated - Micro Porous
- Breathable
- Limited Flame Spread

### EXCELLENT BARRIER PROTECTION

SERVICE MASTER® is very effective in holding out dust particles and chemicals to meet with 5/6 standards - even better than its predecessor.

### HIGHER COMFORT

SERVICE MASTER® is lighter and even more breathable than before and certainly the most comfortable 5/6 product on the market.


### ENVIRONMENTALLY FRIENDLY

SERVICE MASTER® uses 20% less raw materials than any other product on the market whilst offering better barrier.

### 5-PLY FABRIC CONSTRUCTION

Extra protection against fine dust particles

Breathable  
(Direction of air permeability)

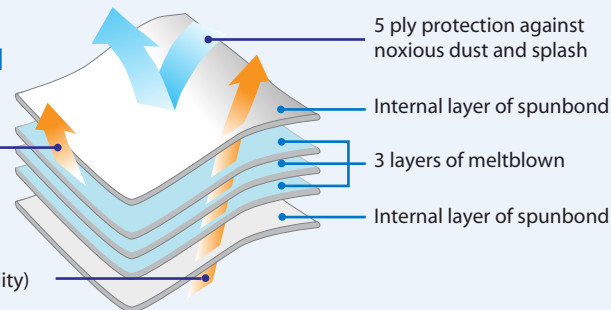


CE 0120  
Category 3

Doc. Control:	Rev.: 3.2	Date: April 9, 2016
---------------	-----------	---------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT CH 8030-3.2

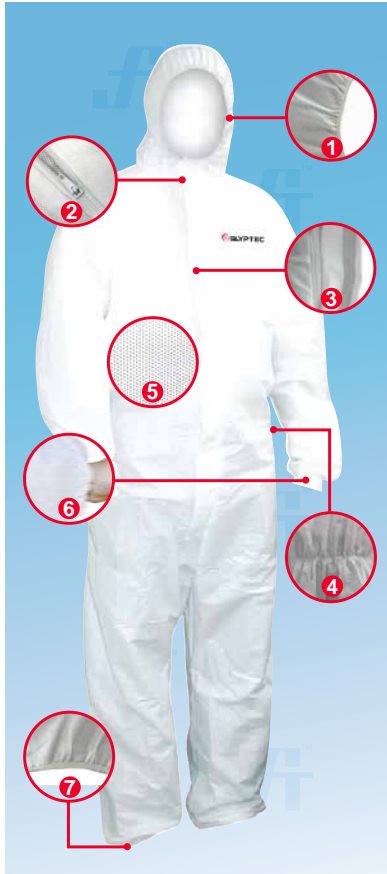

**SERVICE MASTER® 600FR**  
 Article No.: 63203GT01

**KEY FEATURES**

- 3-piece hood
- One way white nylon zipper
- Stormflap with adhesive tab for secure fastening
- Elasticated back waist for a better fit
- Breathable fabric
- Latex-free elasticated cuffs stitched outside to reduce allergy attacks
- Latex-free elasticated ankles stitched outside to reduce allergy attacks

**PACKING**

25 pcs. per carton,  
1 pc. per vacuum pack

**APPLICATIONS**

- Industrial & Petrochemical
- Agriculture & Farm Pesticide
- Abattoirs
- Asbestos Handling
- Car Industry
- Clean Room Farming
- Food Processing Industry
- Maintenance and Repairs
- Medical / Emergency Services
- Pharmaceutical
- Police - Scene of Crime
- Forensic Science
- Technology Industry
- 2-Pack Paint Spray
- Waste Management Services

**SIZE CHART**

HEIGHT		
S	164-170cm	(5'4" - 5'6")
M	167-176cm	(5'5" - 5'9")
L	174-181cm	(5'8" - 6')
XL	179-187cm	(5'11" - 6'2")
2XL	186-194cm	(6'1" - 6'4")
3XL	194-200cm	(6'3" - 6'6")

CHEST		
S	84-92cm	(33" - 36")
M	92-100cm	(36" - 39")
L	100-108cm	(39" - 42")
XL	108-115cm	(42" - 45")
2XL	115-124cm	(45" - 49")
3XL	124-132cm	(49" - 52")

Performance of Glyptec® Service Master® Coverall	Test Method	Index of penetration	Index of repellency
Physical Data			
Resistance to 30% Sulphuric Acid	EN 368	3/3	3/3
Resistance to 10% Sodium Hydroxide	EN 368	3/3	3/3
Physical Data	Test Method	Class Result	
Whole Suit Reduced Spray Test (Type 6)	EN 13034	Pass	
Whole Suit Inward Leakage for Fine Particles (Type 5)	BS EN ISO13982-(1&2)	Pass - Ljmn 82/90 ≤ 30% Ls 8/10 ≤ 15%	
Abrasion Resistance	EN 530 Method 2	2/6	
Trapezoid Tear Resistance	ISO 9073-4	1/6	
Seam Strength	BS EN ISO 13935-2	3/6	
Flex Cracking Resistance	ISO 7854 Method B	6/6	
Puncture Resistance	EN 863	1/6	
Resistance to Ignition	EN 13274-4 Method 3	Pass	
Bursting Strength	ISO 13938-1	2/6	
Tensile Strength	ISO 13934-1	1/6	
Protection Against Radioactive Contamination	EN 1073-2:2002	1/3	
Anti-static	EN 1149-1:1995	Pass on both sides	
Protective clothing against limited flame spread materials	EN ISO 14116:2008		


**CE 0120**  
**Category 3**

Doc. Control:	Rev.: 3.2	Date: April 9, 2016
---------------	-----------	---------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT CH 8030-3.2


 A PRODUCT OF  
**PROTECTIVE LINE**