



## AV-HB35 EAR MUFF

Article No.: 2536AV410

High Performance economy ear muff, 28 dB NRR. With AVES® AV-HB35 you get all the features and performance without paying the price that normally is associated with a high performance product.



Smart foldout storage position



Normal muff storage position



AV-SS25 Support Strap (Optional)




AV-SGB30 Fits all earmuffs (Optional)

### TECHNICAL SPECIFICATIONS

- 28 dB Certified NRR to ANSI S3.19-1974
- 30 dB Certified SNR to CE EN 352-1
- Protection Level: 101—111 dB
- Soft & pliable SuperSeal™ ear cushions & a soft cushioned headband
- Fully dielectric construction
- Low headband force for great comfort.
- Multi-position use with Support Strap (AV-SS25)
- Self-aligning suspension, and easy adjustment
- Color: Black ear cup, Red volume ring, other components black
- Weight: 258g (9.2 oz.)
- Dimension (in mm): 205 long (rest) x 80 wide x 235 high (fully extended)

### MATERIAL SPECIFICATIONS

Headband	: Dupont Delrin Acetal	Foam Absorber	: Urethane
Ear cup	: ABS	Head cushion	: PVC/Polyester
Volume ring	: ABS	Ear cushion	: PVC/Polyester
Slide clip	: PUR		

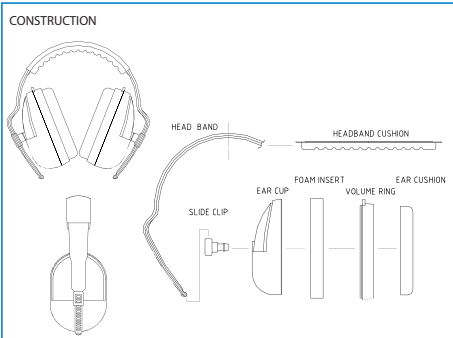

### ANSI S3.19-1974

AV-HM35	Frequency, Hz	125	250	500	1000	2000	3150	4000	6300	8000	H	M	L	NRR
	Mean Value, dB	17.6	24.1	32.6	39.9	37.6	37.0	37.9	40.0	40.2	36	31	23	28
	Std. Deviation	2.0	2.0	2.4	3.2	2.6	1.9	2.6	2.2	2.4				

### CE EN-352-1:1993

AV-HM35	Frequency, Hz	63	125	250	500	1000	2000	4000	8000	H	M	L	SNR
	Mean Value, dB	14.6	14.2	22.3	32.2	37.4	34.1	33.7	36.8				
	Std. Deviation	4.2	3.7	3.5	3.2	4.3	3.1	3.2	2.7	32	28	18	30
	Protection	10.4	10.5	18.8	29.0	33.1	31.0	30.5	34.1				

Doc. Control:	Rev.:	Date:
	3.2	April 5, 2016

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT EP 3024-3.2