

## HUGHES



**SAFETY-SHOWERS**

### PORTABLE EMERGENCY EYE/FACE & BODY SHOWER

Article No.: STD-38G



Unheated Portable Emergency Eye, Face and Body Shower, has stainless steel cylinder with pressure gauge, safety valve and Optiflex, a hand-held Eye, Face and Body wash.

The hand-held Eye, Face and Body wash can be used to treat disabled personnel or can be used for decontaminating the eyes or used for washing other parts of the body.



- The cylinder contains 15 litres of water when fully charged.
- Designed to deliver a spray of water for a period of 2 minutes.
- The cylinder incorporates a pressure gauge and is pressurised to 6 bar via a standard tyre valve.
- The cylinder has a dual action safety valve set at approximately 8 bar which prevents over pressurisation and allows the user to vent the air pressure for cleaning and maintenance.

Note: The unit is supplied empty and should be filled immediately upon installation.

#### SPECIFICATION

Cylinder Material	:	Stainless Steel
Overall cylinder capacity	:	18.92 Litres
Fluid Fill Capacity	:	15 Litres (3.9 US Gall)
Operation	:	Hand Operated Lever
Operating Pressure	:	6.9 BAR G
Test Pressure	:	13.8 BAR G
Burst Pressure	:	69 BAR G
Operating Duration	:	2 Minutes
Overall Dimensions	:	220 dia x 650mm
Unit Weight When Full	:	19kg (approx)
Unit Weight When Empty	:	5 kg (approx)

#### OPTIONAL FITTINGS



• Eyewash Sign



• Spring Coiled Hose



• GRP Cabinet



• Defend® Water Preservative



• Defend® Water Preservative



• Eyewash Station Cleaning Kit

Doc. Control:	Rev.:	Date:
	3.2	April 12, 2016

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT ES 1522-3.2

# HUGHES

**SAFETY-SHOWERS**

## PORTABLE EMERGENCY EYE/FACE & BODY SHOWER

Article No.: STD-38G

DIMENSIONS IN MILLIMETRES



PICTOGRAM EYE WASH SIGN SUITABLE FOR WALL MOUNTING. (OPTIONAL)

LEVER OPERATED FILLER CAP FOR WATER/EYESALINE, FITTED WITH AIR RELEASE VALVE

PRESSURE GAUGE & SCHRAEDER AIR VALVE


OPTIFLEX SUPPORT BRACKET/ DUST COVER

OPTIFLEX EYE, FACE & BODY SHOWER

OPERATING INSTRUCTIONS

1.5 METRE LONG FLEXIBLE HOSE

14 LITRE STAINLESS STEEL CYLINDER

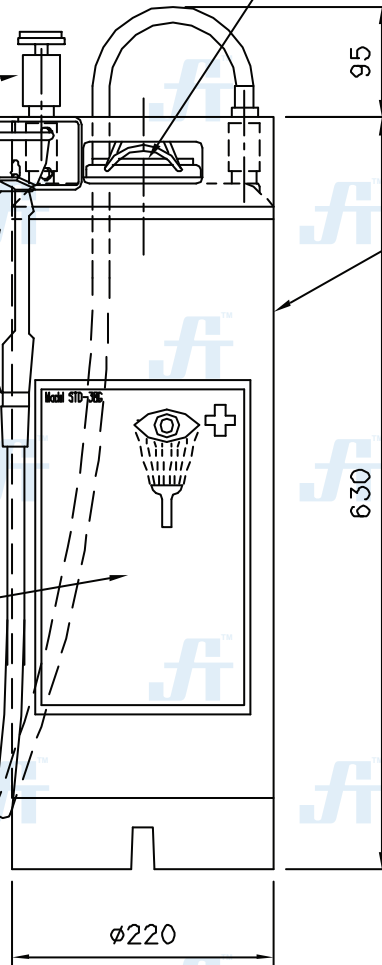

PORTABLE EYE/FACE AND BODY WASH UNIT.

# HUGHES SAFETY SHOWERS

Whitefield Rd, Bredbury, Stockport, Cheshire, SK6 2SS, England.  
Tel (0)161 430 6618, Fax (0)161 430 7928.  
Email : sales@hughes-safety-showers.co.uk

DRAWN	CHECKED	APPROVED	MODEL
ASF	AL	ADH	STD-38G
DATE	23/06/03		DRAWING NO: DG36036 REV B

Doc. Control:	Rev.: 3.2	Date: April 12, 2016
---------------	-----------	----------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT ES 1522-3.2